


NX Clamp Wedge Type



NX




NX

Type	Dimensions (mm)						Failure load (K/N)	Weight (kg)
	Type	External diameter	C	d	L	R		
NX-1	GJ-25-35	6.6~7.8	18	16	150	6.0	≥45	1.20
NX-2	GJ-50-80	9.0~11.5	20	18	180	7.3	≥88	1.76

NUT Clamp (adjustable type)



NUT




NUT

Type	Dimensions (mm)						Failure load (K/N)	Weight (kg)
	Type	External diameter	d	L	L1	C		
NUT-1	GJ-25-35	6.6~7.8	16	370	200	56	≥45	2.1
NUT-1	GJ-50-80	9.0~11.5	18	452	250	62	≥88	3.2

L Type Yoke Plates



L

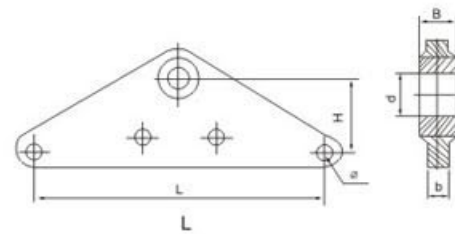

L

Type	Dimensions (mm)						Failure load (K/N)	Weight (kg)
	b	B	H	d	∅	L		
L-1040	16	16	70	20	18	400	≥100	4.43
L-1240	16	16	70	24	18	400	≥100	4.66
L-1640	18	18	100	26	20	400	≥160	5.85
L-2140	16	26	100	30	20	400	≥210	7.00
L-2540	16	30	110	33	24	400	≥250	9.00
L-3040	18	32	110	39	26	400	≥300	10.00

ANSI Spindle Of Pin Type Insulators For High Voltage

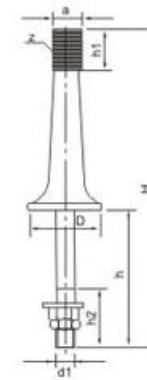


Fig 1




Fig 2



Fig 3

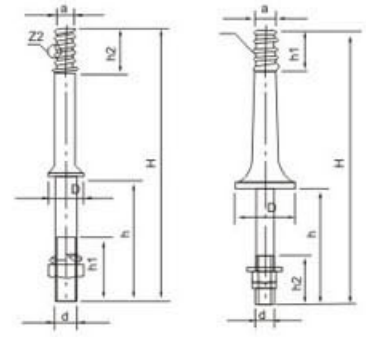


Fig 4

Main Dimensions and Standard Particulars

Fig No.	Main dimensions (mm)							Mechanical strength (KN)	Class ANSI	Weight (kg)
	H	D	h	h1	h2	a	d1			
1	330	76	178	51	76	34.9	20	11	56-1	1.9
1	356	76	178	51	76	34.9	20	9	56-2	2.2
1	407	89	178	51	76	34.9	20	10	56-3	2.5
1	432	89	178	51	76	34.9	20	9	56-4	3.25
1	343	45	165	51	76	34.9	20	6	56-2	1.6
2	198	76	45	51	40	34.9	20	11	56-1	1.54
2	223	76	45	51	40	34.9	20	9	56-2	1.87
2	274	89	45	51	40	34.9	20	10	56-3	2.17
2	299	89	45	51	40	34.9	20	9	56-4	2.7
2	223	45	45	51	40	34.9	20	6	56-2	1.3
1	356	76	76	51	76	34.9	16	5	56-2	1.9
3	305	38	140	74	44.45	18.29	20	5	BS small steel	1
3	352	41	127	80	44.45	18.29	22	5		1.2
3	215	38	50	44	44.45	18.29	20	5		0.75
4	261	60	46	47	41	27.78	22	10	BS large steel	1.5
4	369	51	140	47	78	27.78	22	10		2