




CHINA JINWANG ELECTRICAL

NLD Malleable Cast-Iron Strain Clamp

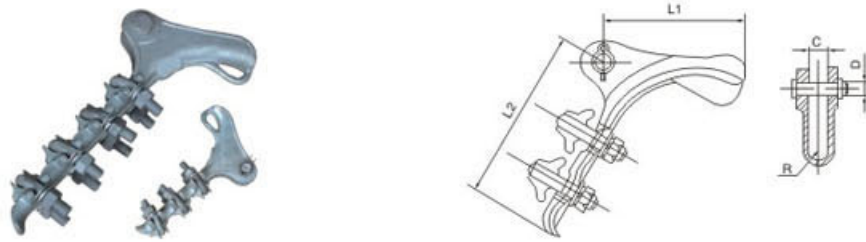


Type	Conductor (mm)	Dimensions (mm)					Bolt		Failure load (K/N)
		D	C	L1	L2	R	No.	D	
NLD-1	5.0~10.0	16	18	150	120	6.5	2	16	18
NLD-2	10.1~14.0	16	18	205	130	8.0	3	16	41
NLD-3	14.1~18.0	18	22	310	160	11.0	4	18	71
NLD-4	18.1~23.0	18	22	410	220	12.5	5	18	91

NPL Aluminum Alloy Strain Clamp

Application:

The wire clamp is applicable to fix small-section aluminium-splicing wire and steel-splicing wire on a pole, it is made of highly strong aluminium alloy.

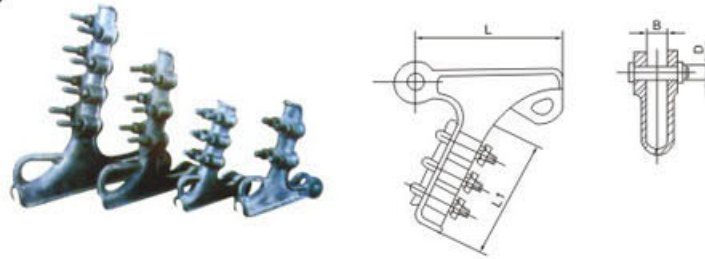


Type	Conductor (mm)	Dimensions (mm)				Failure load (K/N)
		D	B	L	L1	
NPL-1	5.1~11.4	16	18	155	208	60
NPL-2	11.4~18	16	20	130	205	70
NPL-3	15.7~26	18	27	204	240	80
NPL-4	22.5~30	18	30	295	338	90

NLL Relaxation-Proof Clip Alumium Alloy Strain Clamp




Type	Conductor (mm)	Dimensions (mm)				Failure load (K/N)
		L	I	C	D	
NLL-1	5.1~11.4	125	110	19	16	40
NLL-2	8.9~18.5	175	186	24	16	40
NLL-3	5.0~15.0	190	205	18	16	70
NLL-4	12.1~21.8	300	285	30	18	90
NLL-5	18.0~30.0	445	345	36	24	120

XGU Malleable Iron Suspension Clamp

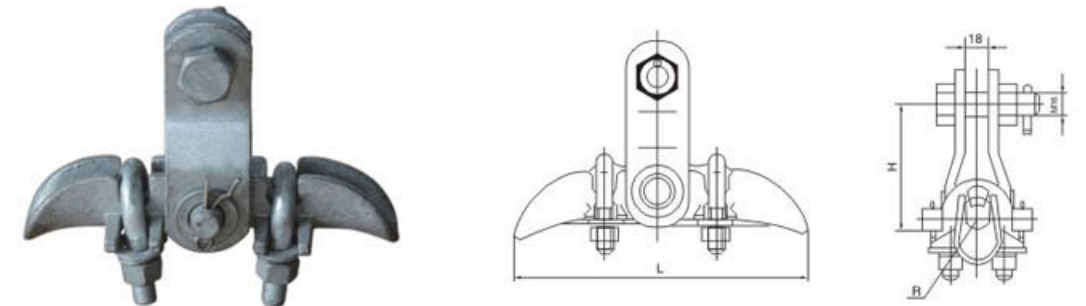

Type	Suitable conductor (with wraps)(mm)	Dimensions (mm)			Untimeate strength (K/N)	Weight (kg)
		H	L	R		
XGU-1	5.0~7.0	82.5	180	4.0	≥40	1.4
XGU-2	7.1~13.0	82	200	7.0	≥40	1.8
XGU-3	13.1~21.0	101	220	11.0	≥40	2.0
XGU-4	21.1~26.0	109	250	13.5	≥40	3.0

XGF Droop Type Suspension Type

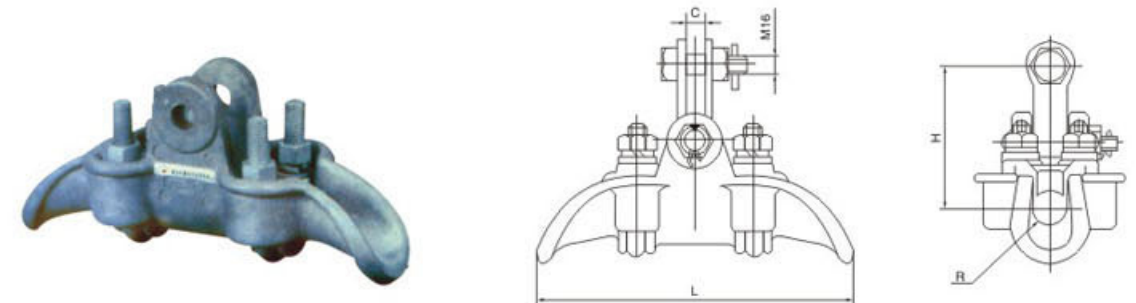

Type	Suitable conductor (with wraps)(mm)	Dimensions (mm)				Untimeate strength (K/N)	Weight (kg)
		C	H	L	R		
XGF-5X	23.7~27.6	18	147	300	17	60	3.55
XGF-7X	35.0~44.0	20	135	300	22	75	4.50
XGF-6X	45.0~48.7	18	135	300	26	60	4.85